


Flachdichtungen Standard EN 1514-1

Flachdichtungen Form IBC (Nenndruck 6 bis 40)

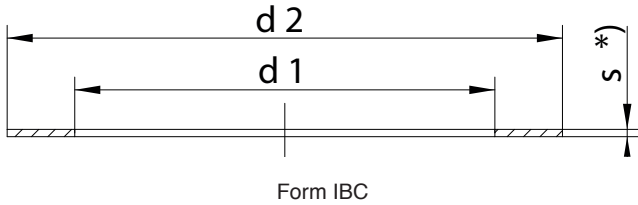

| Form IBC (Maße in mm) | | | | | | |
|-----------------------|------|----------------|-------------------------|-------------------------|-------------------------|-----|
| DN [mm] | d1 | d2 | | | | |
| | | Nenndruck [ND] | | | | |
| | | 6 | 10 | 16 | 25 | 40 |
| 10 | 18 | 39 | nach ND 40 bestellen | nach ND 40 bestellen | nach ND 40 bestellen | 46 |
| 15 | 22 | 44 | | | | 51 |
| 20 | 27 | 54 | | | | 61 |
| 25 | 34 | 64 | | | | 71 |
| 32 | 43 | 76 | | | | 82 |
| 40 | 49 | 86 | | | | 92 |
| 50 | 61 | 96 | | | | 107 |
| 60 | 72 | 106 | | | | 117 |
| 65 | 77 | 116 | | | | 127 |
| 80 | 89 | 132 | | | | 142 |
| 100 | 115 | 152 | nach ND 16 bestellen | 162 | 168 | |
| 125 | 141 | 182 | | 192 | 194 | |
| 150 | 169 | 207 | | 218 | 224 | |
| 200 | 220 | 262 | | 273 | 284 | 290 |
| 250 | 273 | 317 | 328 | 329 | 340 | 352 |
| 300 | 324 | 373 | 378 | 384 | 400 | 417 |
| 350 | 356 | 423 | 438 | 444 | 457 | 474 |
| 400 | 407 | 473 | 489 | 495 | 514 | 546 |
| 450 | 458 | 528 | 539 | 555 | 564 | 571 |
| 500 | 508 | 578 | 594 | 617 | 624 | 628 |
| 600 | 610 | 679 | 695 | 734 | 731 | 747 |
| 700 | 712 | 784 | 810 | 804 | 833 | |
| 800 | 813 | 890 | 917 | 911 | 942 | |
| 900 | 915 | 990 | 1017 | 1011 | 1042 | |
| 1000 | 1016 | 1090 | 1124 | 1128 | 1154 | |
| 1200 | 1220 | 1307 | 1548 | 1542 | 1578 | |
| 1400 | 1420 | 1524 | 1772 | 1764 | 1798 | |
| 1600 | 1620 | 1724 | 1972 | 1964 | 2000 | |
| 1800 | 1820 | 1931 | 2182 | 2168 | 2230 | |
| 2000 | 2020 | 2138 | 2384 | | | |
| 2200 | 2220 | 2348 | 2594 | | | |
| 2400 | 2420 | 2558 | 2794 | | | |
| 2600 | 2620 | 2762 | 3014 | | | |
| 2800 | 2820 | 2972 | 3228 | | | |
| 3000 | 3020 | 3172 | | | | |
| 3200 | 3220 | 3382 | | | | |
| 3400 | 3420 | 3592 | | | | |
| 3600 | 3620 | 3804 | | | | |

*) s = Stärke der Dichtung kann beliebig gewählt werden.